



EMULATION TECHNOLOGY, INC.


PROGRAMMING ADAPTER SPECIFICATION

Item: 484001BG600-8
Description: AS-48-40-01BG-6YAM-8

REPLACEMENT SOCKET: S-MBGA-6X8-48-B

Call Emulation Technology for a replacement socket price and delivery quote.


TYPICAL DIMENSIONS:

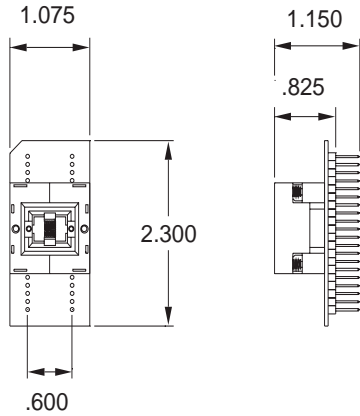

All Dimensions in Inches.

(Assembly Drawing: F5699)

PACKAGE SPECIFICATIONS:

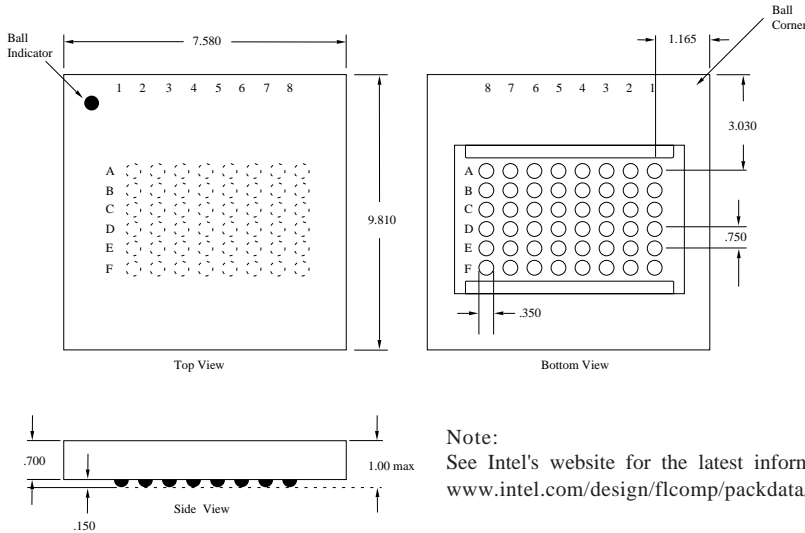

All Dimensions in Millimeters.

ET Code: 048-4BG-6X8

Compatible μ BGA devices:
GT28F004B3
GT28F008B3

Manufacturers:
Intel

CONNECTION TABLE:

48-Ball μ BGA TM SOCKET	PIN Names	40-Pin DIP Base
A4	V _{PP}	1
D7	CE#	2
A5	WP#	3
C4	NC	4
B4	RP#	5
C5	NC	6
A6	A20	7
B5	A19	8
B6	A18	9
D1	A17	10
E8	GND ²	11
F2	DQ7	12
E3	DQ6	13
D3	DQ5	14
F4	DQ4	15
E5	DQ3	16
D5	DQ2	17
F7	DQ1	18
E7	DQ0	19
F8	OE#	20
D8	A0	21
C8	A1	22
B8	A2	23
C7	A3	24
A8	A4	25
B7	A5	26
C6	A6	27
A7	A7	28
A3	A8	29
F1	GND ²	30
C3	A9	31
B2	A10	32
E2	A11	33
A2	A12	34
C2	A13	35
A1	A14	36
B1	A15	37
C1	A16	38
B3	WE#	39
F5/E1(L3/4)	V _{cc} /V _{ccq} ¹	40(L3/4)

Notes:

- μ BGA F5 (V_{cc}) and DIP 40 (V_{cc/q}) are tied to V_{cc} layer 3. μ BGA E1 (V_{cc/q}) and DIP40 (V_{cc/q}) are tied to V_{ccq} layer 4.
- μ BGA F1 and E8 (GND) and DIP 11 and 30 (GND) are tied to GND layers 2 and 5.



EMULATION TECHNOLOGY, INC.

2344 WALSH AVENUE ♦ BUILDING F
SANTA CLARA, CA 95051-1301
TEL 408/982.0660 ♦ FAX 408/982.0664

Call today for a FREE Full Line Catalog and Unlimited Application Consulting!