


REV	DESCRIPTION	DATE	INIT
A	NEW DRAWING	03-14-05	M.D.
B	ADDED NOTE	04/29/05	H.N.



SKT2253

OPERATING TEMPERATURE: -55°C/+125°C
 STORAGE TEMPERATURE: ROOM (TEMP)
 MAX CURRENT PER PIN: SEE DERATING CURVE IN TEST REPORT
 MTBF: APPLICATION DEPENDENT.

TOP VIEW

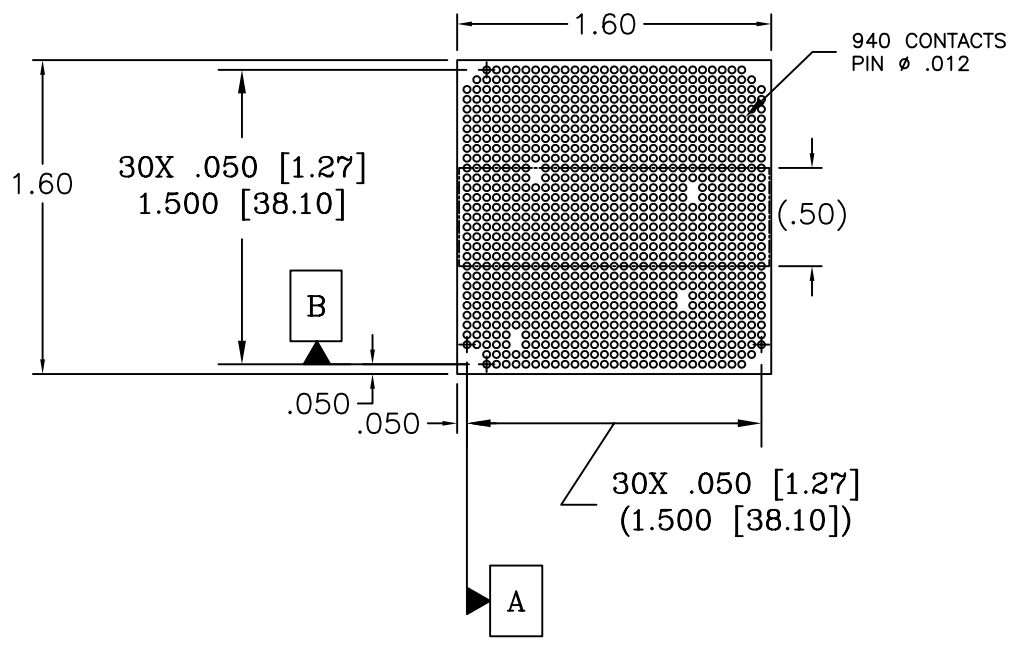

SIDE VIEW

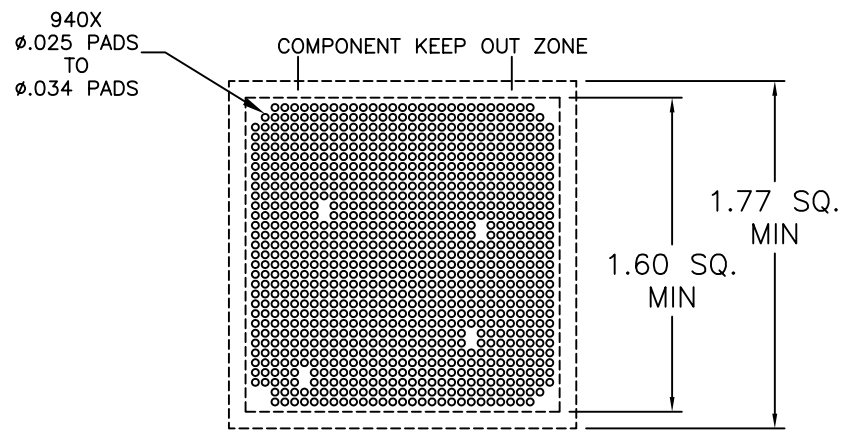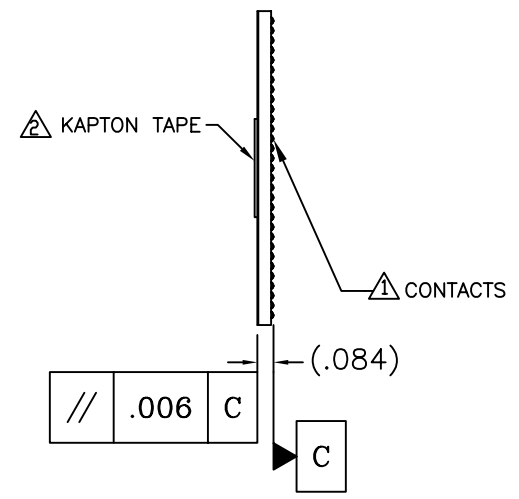

NOTES:

- 1 EXPOSED COPPER TO BE PLATED WITH ELECTROLESS Ni AND OVERPLATED WITH IMMERSION Au
 Ni: .000100 MINIMUM
 Au: .000005 - .000008
- 2 KAPTON TAPE IS FOR PICK AND PLACE, OPTIONAL.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED



Emulation Technology, Inc.
 -VLSI and SMT ADAPTERS and ACCESSORIES-

www.emulation.com TEL: (408) 982-0660
 2344 Walsh Ave, Bldg. F Santa Clara, CA 95051 FAX: (408) 982-0664

SHEET: 1 OF 1	DATE: 04/29/05	REVISION: B	ASSEMBLY DRAWING
CHECKED: PERRY MUNROE	DRAWN: MIGUEL DELGADILLO	ITEM: HLS-310940-A-10	DESCRIPTION: HLS-310940-A-10
DO NOT SCALE DRAWING			