



REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/25/02	H.N.

F6680
DOD 36680

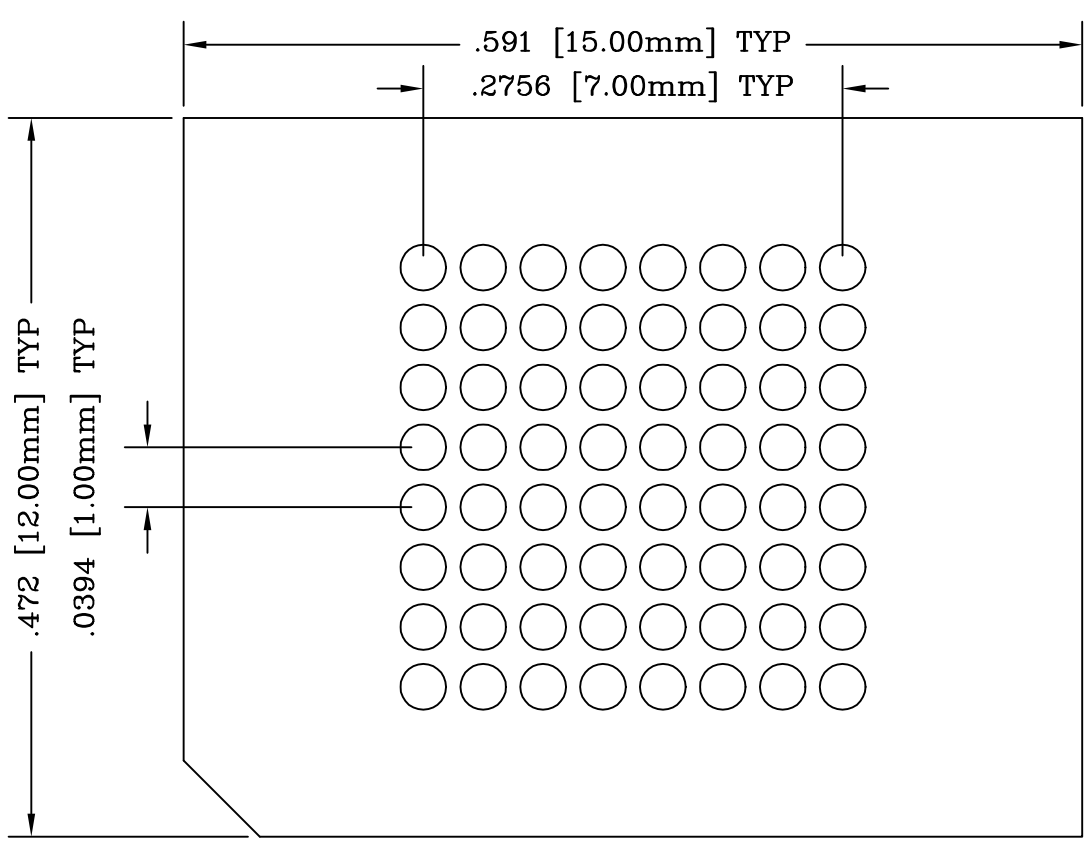

Δ .006 [0.15mm]
SEE NOTE 4

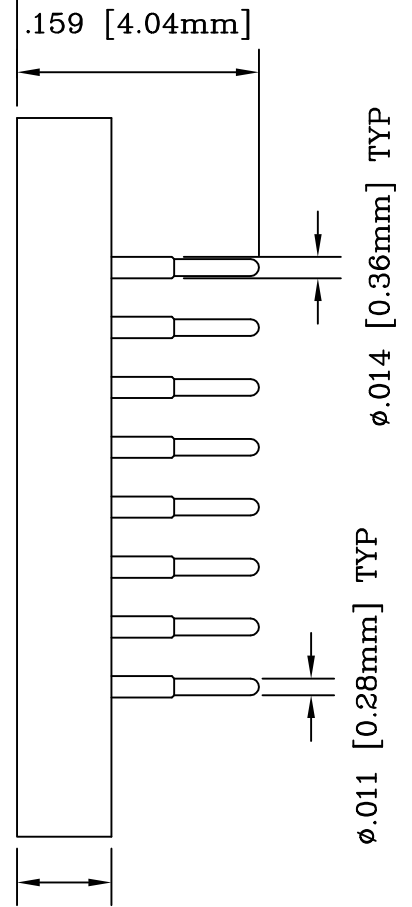


NOTES:

- MATERIALS:**
INSULATOR: FR-4 GLASS EPOXY U.L.
RATED 94V-0, (UNCLAD) COLOR: BLACK.
TERMINAL: BRASS, C36000, ASTM-B-16
- PLATING:**
TERMINAL: .000010 [0.000254mm] MIN. GOLD OVER
.000050 [0.00127mm] MIN. NICKEL
- MANUFACTURING DATE CODE LABEL - P/N: 4756**
- APPLIES TO TOP SURFACE OF PINS ONLY.**

PACKAGE SPECIFICATIONS	
PIN COUNT	≡ 64
LEAD PITCH	≡ 1.00mm
GRID SIZE	≡ 8X8
PACKAGE SIZE	≡ 9.00mm SQ

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED



Emulation Technology, Inc.
— VLSI and SMT ADAPTERS and ACCESSORIES —

2344 Walsh Avenue, Bldg.F Santa Clara, Ca 95051
TEL:(408)982-0660 FAX:(408)982-0664

SHEET: 1 OF 1	DATE: 06/25/02	REVISION: A	ASSEMBLY DRAWING
CHECKED: Perry Munroe	DRAWN: Huy Nguyen	ITEM: FPA-064-3-008NS	
Scale 1:8	DO NOT SCALE DRAWING	DESCRIPTION: FPA-064-3BG008-NS	