



REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	07/16/03	H.N.


F6915
DOD 36915

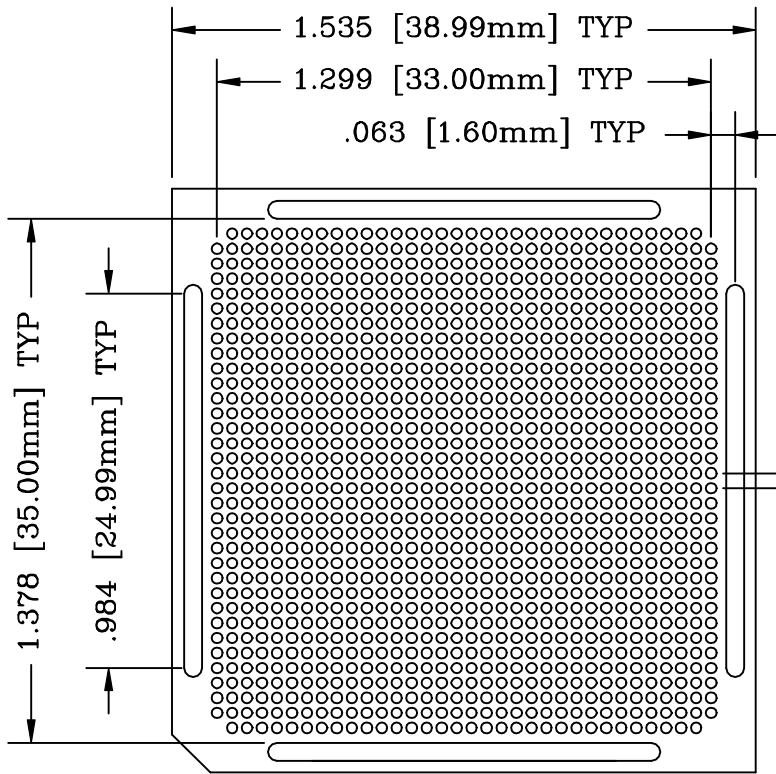

*  .006 [0.15mm]

* APPLIES TO TOP SURFACE OF PINS ONLY.

.159 [4.04mm]



φ.011 [0.28mm] TYP

φ.014 [0.36mm] TYP

.039 [1.00mm] TYP



.062 [1.57mm]

.147 [3.73mm]

PACKAGE SPECIFICATIONS	
PIN COUNT	= 1152
LEAD PITCH	= 1.00mm
GRID SIZE	= 34X34

NOTES:

- MATERIALS:**
INSULATOR: FR-4 BLACK GRASS EPOXY U.L. RATED 94V-0 (UNCLAD).
TERMINAL: BRASS, C36000, ASTM-B-16
- PLATING:**
TERMINAL: .000010 [0.000254mm] MIN. GOLD OVER
.000050 [0.00127mm] MIN. NICKEL.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED			
		Emulation Technology, Inc. — VLSI and SMT ADAPTERS and ACCESSORIES —	
		2344 Walsh Avenue, Bldg.F Santa Clara, Ca 95051	TEL:(408)982-0660 FAX:(408)982-0664
SHEET: 1 OF 1	DATE: 07/16/03	REVISION: A	ASSEMBLY DRAWING
CHECKED: Perry Munroe	DRAWN: Hanh Nguyen		ITEM: FPA-1152-3-034W
Scale 2:1	DO NOT SCALE DRAWING	DESCRIPTION: FPA-1152-3BG034-WS	