

REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	11/13/08	JAG


F8119

**NOTES**

1. Bandwidth: HIGH-SPEED, DC ~15GHz
2. Length of current-carrying part: 2~5mm
3. Conductor resistance: 3mΩ
4. Contact resistance: 10mΩ
5. Withstanding voltage: 80VDC
6. Operating temperature rating: 0°C ~ 80°C (no condensation)

TEST CLIP allows electrode to bend 10°.

The use of a magnifying glass is advised when looking at the tip.

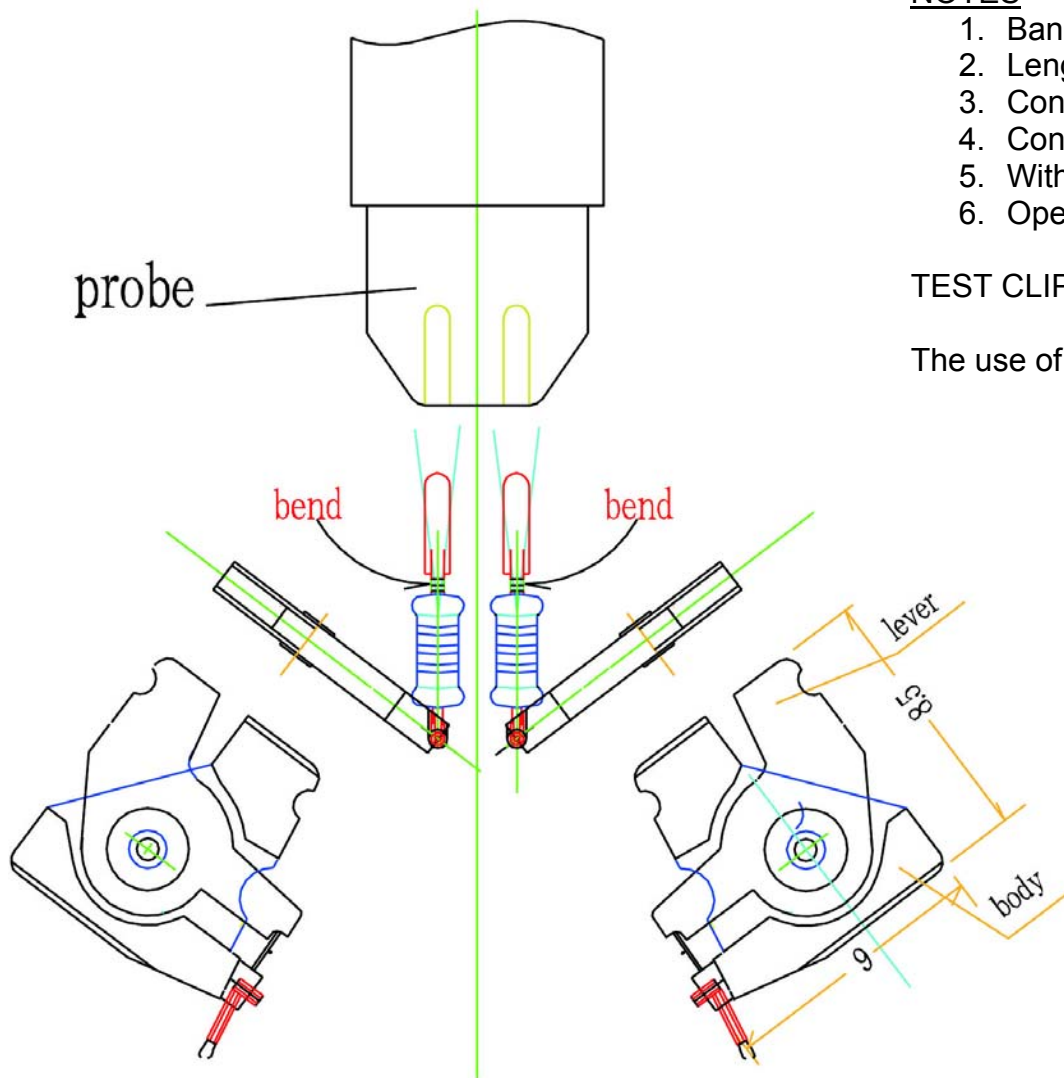

Item #	Accessible IC Pitch	Resistor	Color	
			Body	Lever
FPN-AMT82R	0.65 ~ 1.25	82 Ω	Blue	Blue
FPN-AMT82L	0.65 ~ 1.25	82 Ω	Blue	Green
FPN-AST82R	0.3 ~ 0.65	82 Ω	Red	Blue
FPN-AST82L	0.3 ~ 0.65	82 Ω	Red	Green

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

	<b>EMULATION TECHNOLOGY, INC.</b>		
	VLSI and SMT ADAPTERS and ACCESSORIES		
759 FLYNN ROAD CAMARILLO, CA 93012		TEL: (805) 383-8480 FAX: (805) 383-8484	
SHEET: 1 OF 1	DATE: 11/13/08	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:	PREPARED BY: J. GELACIO		ITEM: FPN-AXT82Y
<b>DO NOT SCALE DRAWING</b>			DESCRIPTION: RESISTOR SIDE TYPE