



REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	11/06/01	H.N.

SKT1466
DOD 41466

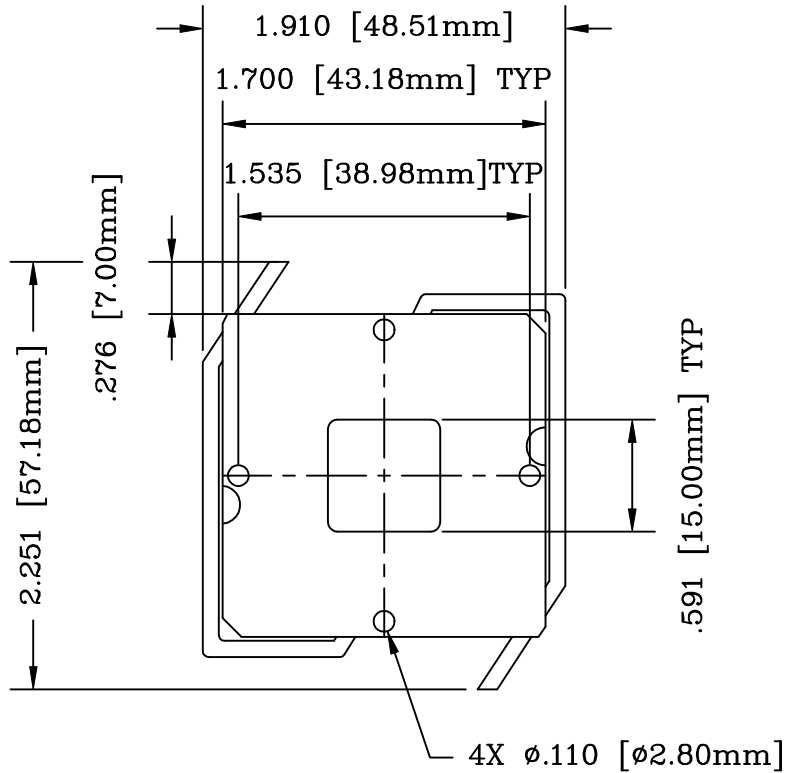

ZIF LEVER-LOCK


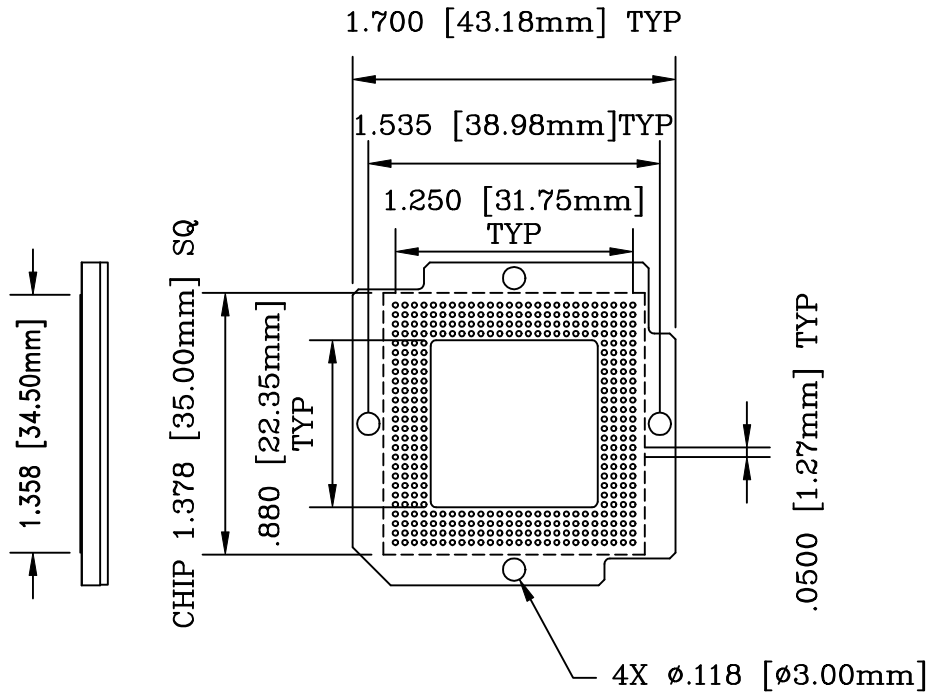


SOCKET

RECOMMENDED PAD LAYOUT

SOLDERTAIL STYLE	
REGULAR SMT STYLE	RAISED SMT STYLE
XX = (-SM)	XX = (-RC)
YY = (-30)	YY = (-29)

SOLDERTAIL = THRU HOLE STYLE
XX = (-ET)
YY = (-70)

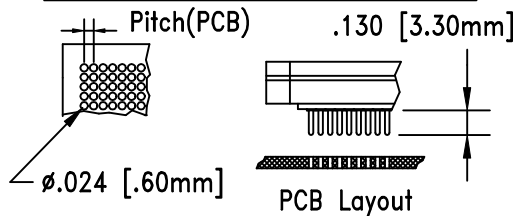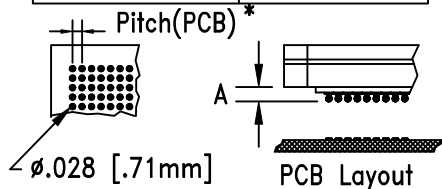

30= standard SMD ("A" = .047 [1.20mm])  
 29= raised SMD ("A" = .197 [5.00mm])

BALL DIAMETER FOR:  
 -29(RC) = .026 [0.66mm]  
 -30(SM) = .026 [0.66mm]

PIN DIAMETER FOR:  
 -70(ET) = .018 [0.45mm]

\* The pitch dimension depends on your Ball Grid Array Package

PACKAGE SPECIFICATIONS

PIN COUNT	= 352
LEAD PITCH	= 1.27mm
GRID SIZE	= 26X26
PACKAGE SIZE	= 35.00mm SQ

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED



**Emulation Technology, Inc.**  
 — VLSI and SMT ADAPTERS and ACCESSORIES —

2344 Walsh Avenue, Bldg. F  
 Santa Clara, Ca 95051

TEL:(408)982-0660  
 FAX:(408)982-0664

SHEET: 1 OF 1	DATE: 11/06/01	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED: Perry Munroe	DRAWN: Huy Nguyen	ITEM: S-BGZ-26-352LXX	DESCRIPTION: BPZ-352-2BG026L-YY
DO NOT SCALE DRAWING			