


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/13/03	SC


SKT1765
DOD41765

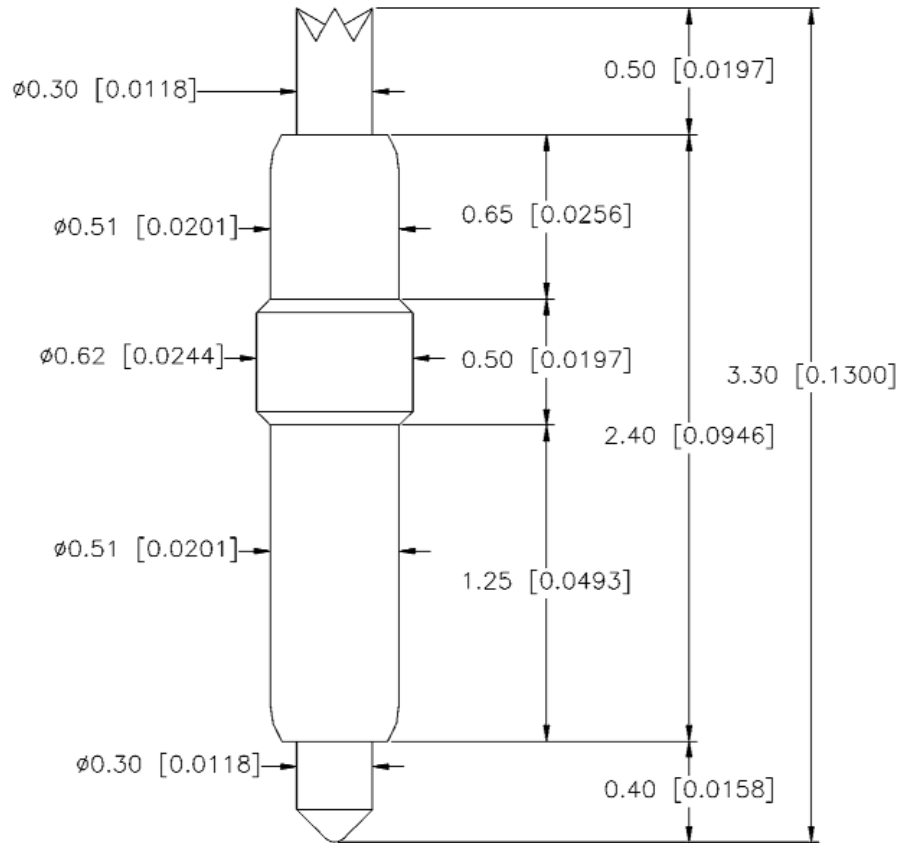

Spring Force
8.50g(0.300oz) at initial travel
16.00g(0.4564oz) at 0.45mm(0.0177) recommended travel
16.50g((0.656oz) at 0.60mm(0.0236) full travel

Material & Finish
Plunger Hardened Beryllium copper /Gold Plated
Barrel Brass / Gold Plated
Spring Music Wire / Gold Plated

Unit: Millimeter[inch]

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED			
		Emulation Technology, Inc. VLSI and SMT ADAPTERS and ACCESSORIES	
		2344 Walsh Avenue, Bldg F Santa Clara, CA 95051	TEL: (408) 982-0660 FAX: (408) 982-0664
SHEET: 1 OF 1	DATE: 6/13/03	REVISION: A	ASSEMBLY DRAWING
CHECKED: Joe Bagliere	DRAWN: SC		ITEM: POGO-PIN-3.30-1
SCALED: N/A	DO NOT SCALE DRAWING	DESCRIPTION: POGO-PIN-3.30-1, 0.80mm Pitch	