


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/16/03	SC

SKT1785
DOD41785

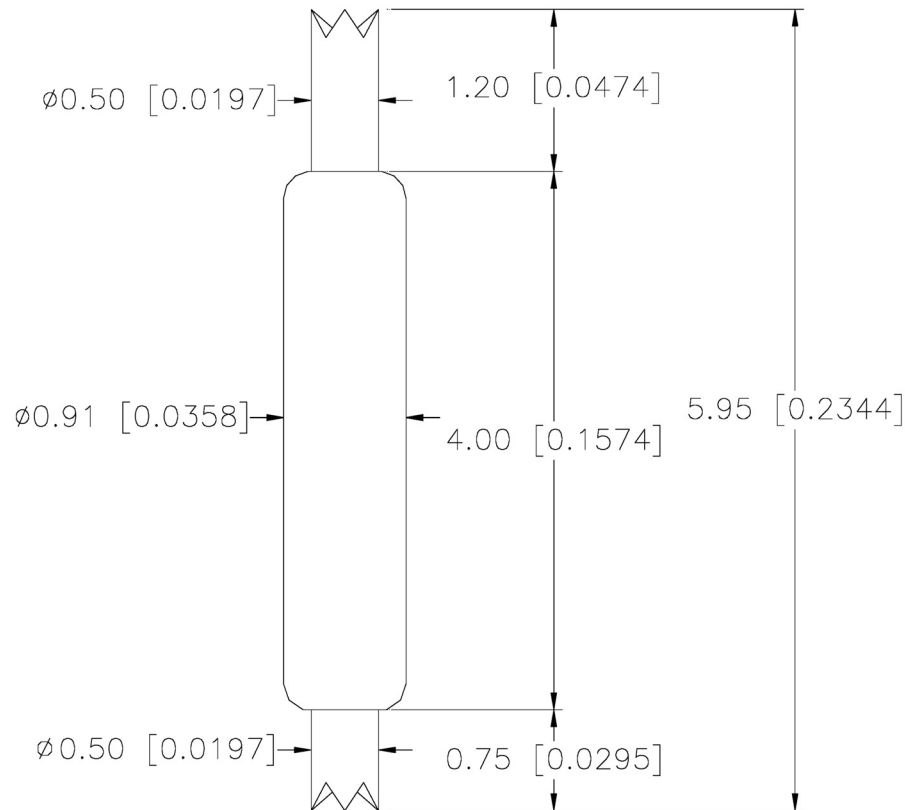

Unit: Millimeter[inch]

Spring force

- 17.30g(0.610oz) at initial travel
- 30.90g(1.090oz) at 0.75mm(0.0295) recommended travel
- 34.10g(1.203oz) at 0.95mm(0.0374) full travel

Material & Finish

- Plunger Hardened Beryllium copper / Gold Plated
- Barrel Brass / Gold Plated
- Spring Music Wire / Gold Plated

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED



Emulation Technology, Inc.

VLSI and SMT ADAPTERS and ACCESSORIES

2344 Walsh Avenue, Bldg F
Santa Clara, CA 95051

TEL: (408) 982-0660
FAX: (408) 982-0664

SHEET: 1 OF 2	DATE: 6/16/03	REVISION: A	ASSEMBLY DRAWING
CHECKED: Joe Bagliere	DRAWN: SC	ITEM: POGO-PIN-5.95-1	
SCALED: N/A	DO NOT SCALE DRAWING		DESCRIPTION: POGO-PIN-5.95-1, 1.27mm Pitch