


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	04/12/04	H.N.
B	ADDED TOLERANCES	02/11/10	JAG

SKT1988
DOD 41988

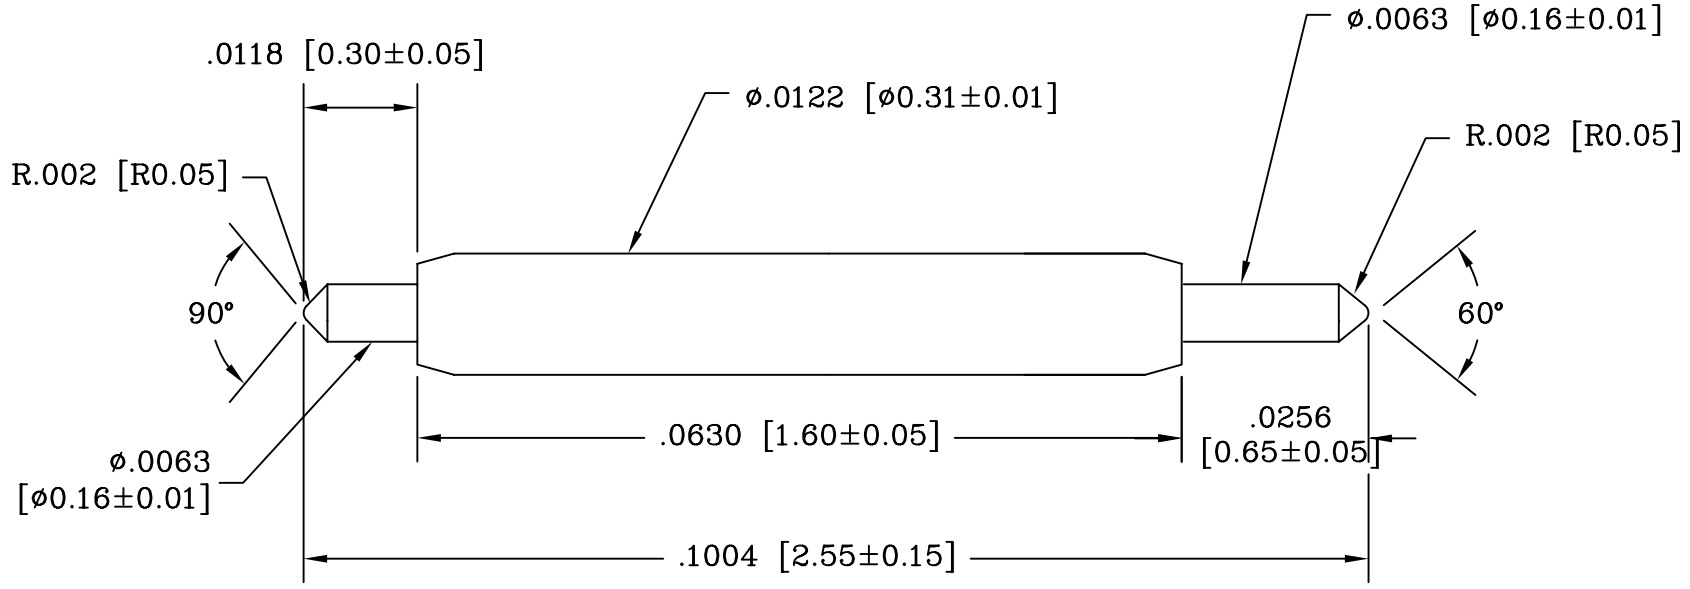

POINTING ACCURACY: $\pm 0.05\text{mm}$


SPRING FORCE [$\pm 20\%$]

- 3.8g(0.134oz) AT INITIAL TRAVEL
- 18.0g(0.635oz) AT 0.45mm(0.0177) RECOMMENDED TRAVEL
- 22.0g(0.776oz) AT 0.60mm(0.0236) FULL TRAVEL

MATERIAL & FINISHES

- PLUNGER: HARDENED BERYLLIUM COPPER / GOLD PLATED
- BARREL: PHOSPHOR BRONZE / GOLD PLATED
- SPRING: MUSIC WIRE / GOLD PLATED

ALL DIMENSIONS ARE IN INCHES [MM] UNLESS OTHERWISE SPECIFIED



Emulation Technology, Inc.

— VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD
CAMARILLO, CA 93012

TEL:(805)383-8480
FAX:(805)383-8484

SHEET: 1 OF 1	DATE: 04/12/04	REVISION: B	ASSEMBLY DRAWING
CHECKED: Perry Munroe	DRAWN: Huy Nguyen	ITEM: POGO-PIN-2.55-2	DESCRIPTION: POGO-PIN-2.55-2
Scale N/A	DO NOT SCALE DRAWING		