

REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	01/20/04	M.W.
B	CORRECTED DWG & SPECS	02/20/15	JAG

SKT2216

SPECIFICATIONS

TEST CENTER .100 (2.54)

MECHANICAL

Full Travel: .062 (1.57)
 Working Travel: .040 (1.02)
 Life Exceeds: 100K cycles

OPERATING TEMPERATURE -35⁰ to +150⁰ C

ELECTRICAL SPECIFICATIONS

Current Rating: 10 amps

PROBE RESISTANCE


Average Probe Resistance: 25 mΩ

MATERIALS AND FINISHES

Plunger: Brass, gold plated over hard nickel
 Barrel: Brass, gold plated over hard nickel
 Spring: Stainless steel, gold plated

SPRING FORCE in oz. (grams)

Standard:
 Preload 1.63 (46)
 Working Travel 4.50 (128)

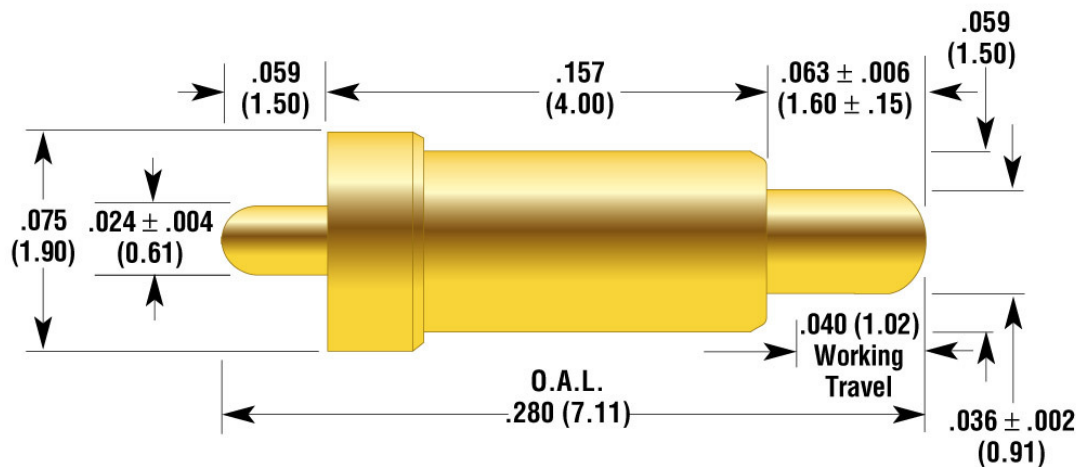

ALL DIMENSIONS ARE IN INCHES [MM] UNLESS OTHERWISE SPECIFIED



EMULATION TECHNOLOGY, INC.

VLSI and SMT ADAPTERS and ACCESSORIES

759 FLYNN ROAD
 CAMARILLO, CA 93012

TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 01/20/04	REVISION: B	ASSEMBLY DRAWING
CHECKED: Perry Munroe	PREPARED BY: Mark Wilson	ITEM: POGO-PIN-7.00-1	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-7.00-1