


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	03/16/05	H.N.

SKT2257

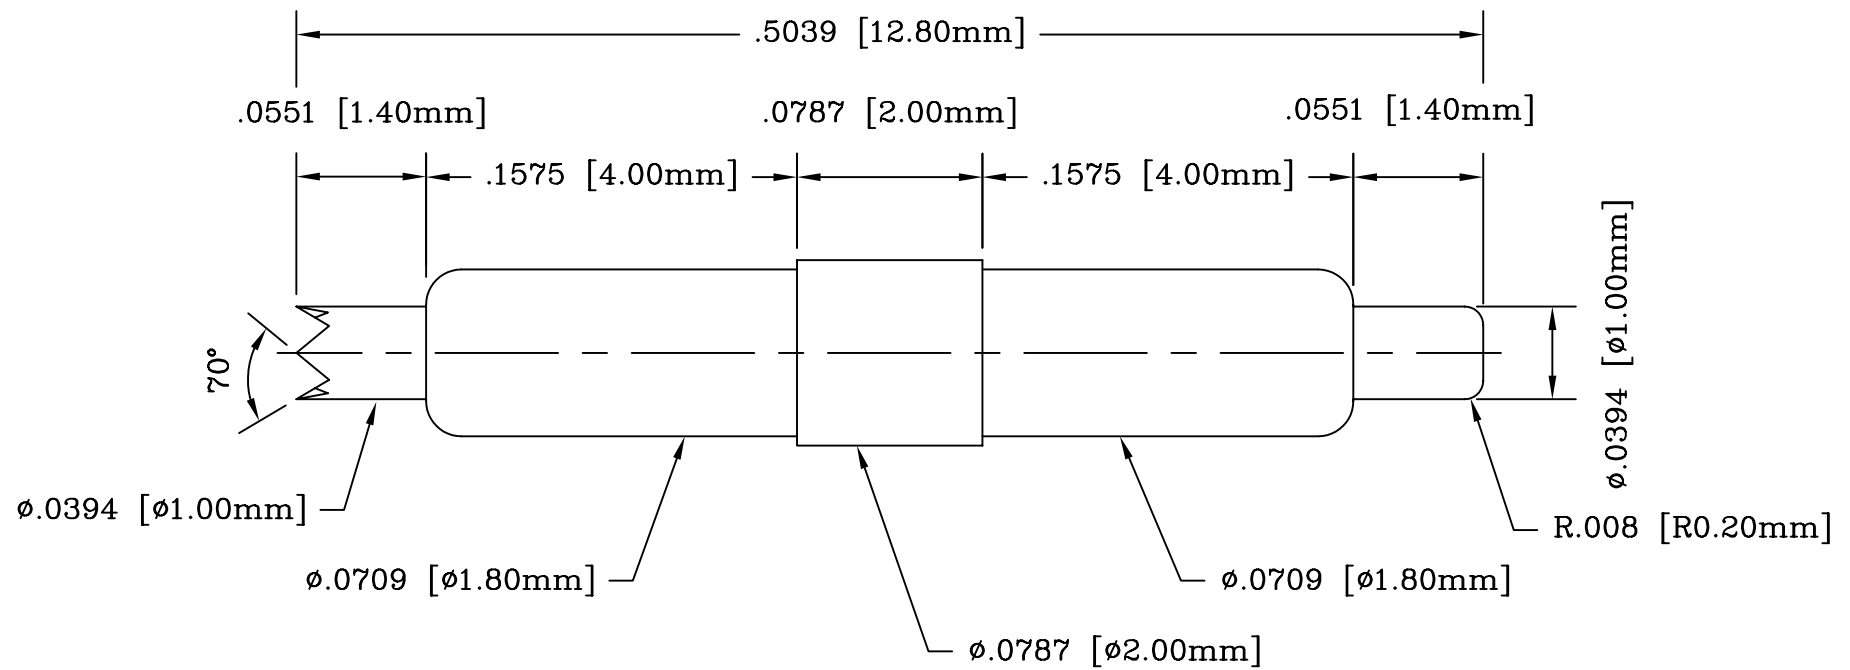


**NOTES:** POINTING ACCURACY: 0.04mm

- 1. SPRING FORCE:** [20%]  
 25.2g (0.889 oz) AT INITIAL TRAVEL.  
 71.3g (2.515 oz) AT .0787 [2.00mm] RECOMMENDED TRAVEL.  
 89.7g (3.164 oz) AT .1102 [2.80mm] FULL TRAVEL.

- 2. MATERIAL & FINISH:**  
 PLUNGER HARDENED BERYLLIUM COPPER/GOLD PLATED.  
 BARREL BRASS/GOLD PLATED.  
 SPRING STAINLESS STEEL/GOLD PLATED.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED



**Emulation Technology, Inc.**  
 — VLSI and SMT ADAPTERS and ACCESSORIES —  
 2344 Walsh Avenue, Bldg.F Santa Clara, Ca 95051  
 TEL:(408)982-0660 FAX:(408)982-0664

SHEET: 1 OF 1	DATE: 03/16/05	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED: Perry Munroe	DRAWN: Huy Nguyen	ITEM: POGO-PIN-12.8-2	DESCRIPTION: POGO-PIN-12.8-2
Scale 12:1	DO NOT SCALE DRAWING		