


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	5/2/05	SC

SKT2291

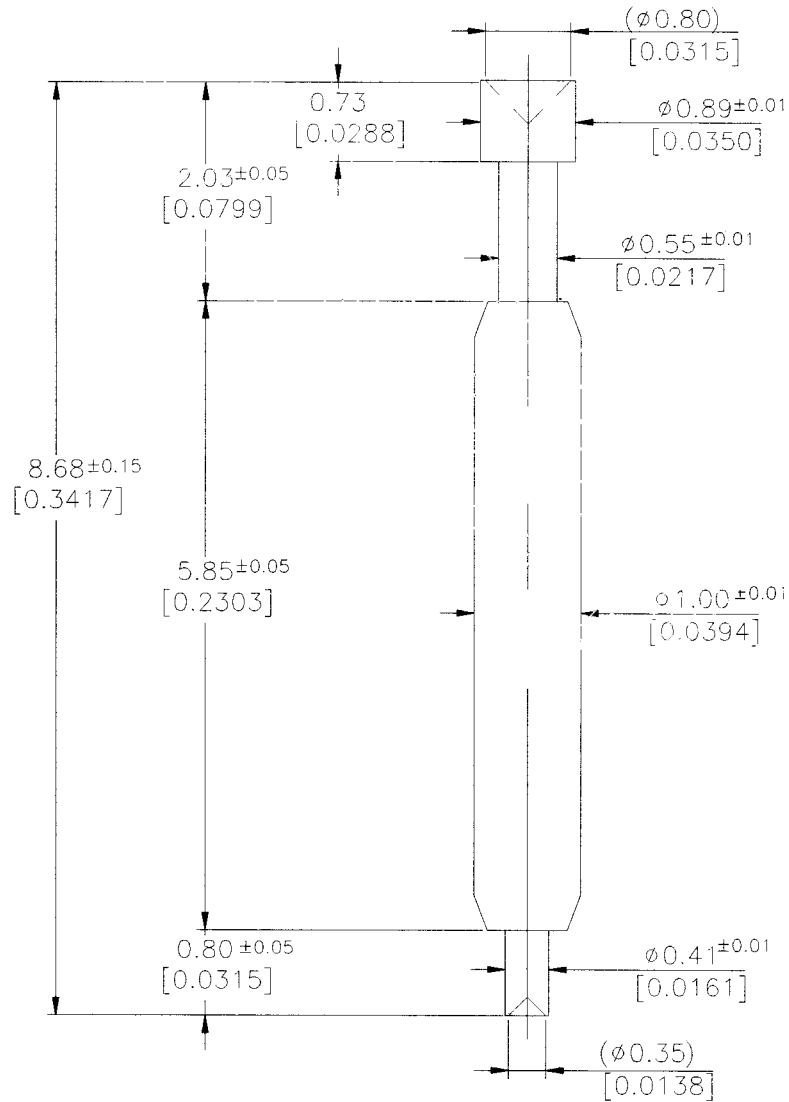

Unit: Millimeter[inch]

Pointing accuracy : 0.05 mm

Spring force [20%]

9.0g(0.317oz) at initial travel

29.3g(1.034oz) at 1.40mm(0.0551) recommended travel

39.4g(1.390oz) at 2.10mm(0.0827) full travel

Material & Finish

Plunger	Hardened Beryllium copper	/ Gold Plated
Barrel	Phosphor Bronze	/ Gold Plated
Spring	Music Wire	/ Gold Plated

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED



Emulation Technology, Inc.

VLSI and SMT ADAPTERS and ACCESSORIES

2344 Walsh Avenue, Bldg F
Santa Clara, CA 95051

TEL: (408) 982-0660
FAX: (408) 982-0664

SHEET: 1	DATE: 5/2/05	REVISION: A	ASSEMBLY DRAWING
CHECKED: Joe Bagliere	DRAWN: SC	ITEM: POGO-PIN-8.68-1	
SCALED: N/A	DO NOT SCALE DRAWING	DESCRIPTION: POGO-PIN-8.68-1	