


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/15/06	H.N.
B	ADDED NOTE #8	10/12/06	H.N.
C	UPDATE DWG/NOTES, ADDED TABLE	01/09/08	JAG

SKT2644

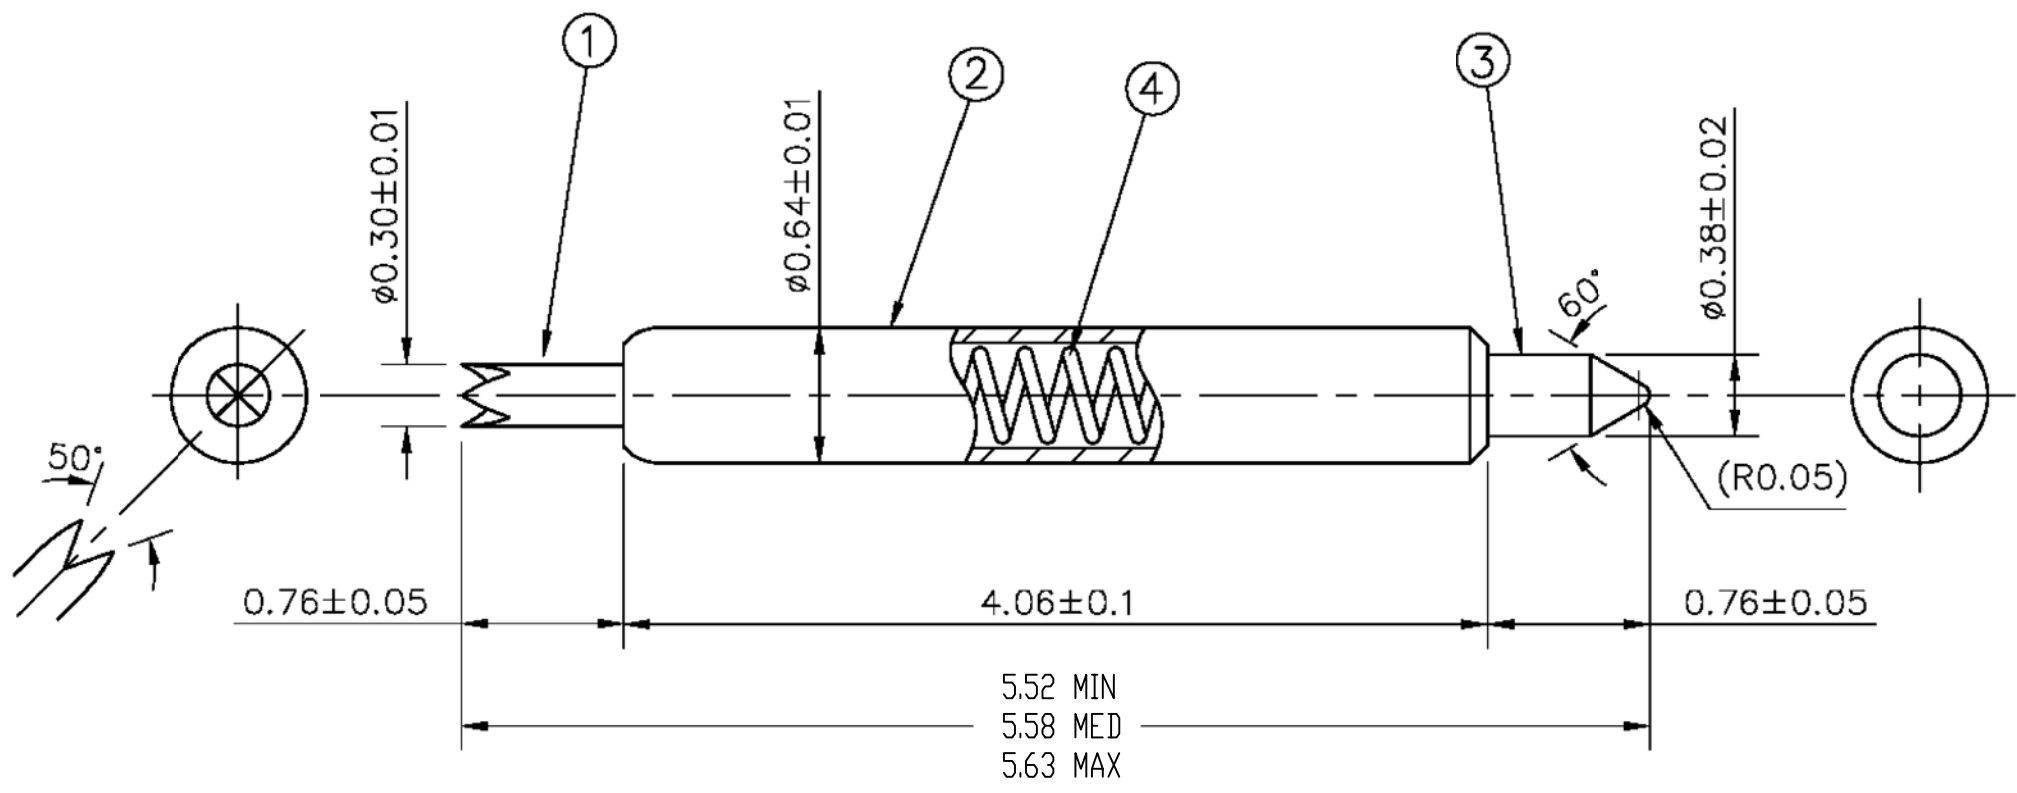

NOTES:

1. OPERATING TEMPERATURE 160 DEG C CONTINUOUS.
2. CONTACT RESISTANCE LESS THAN 100mΩHM.
3. CONTACT SELF INDUCTANCE 1.2nH.
4. -1dBA BANDWIDTH 4.6GHZ.
5. SPRING FORCE 18GF±5GF @ 0.5MM STROKE. MAX STROKE = 1.00MM.

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 — VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD
 CAMARILLO, CA 93012
 TEL: (805) 383-8480
 FAX: (805) 383-8484

ET

SHEET: 1 OF 1	DATE: 06/15/06	REVISION: C	ASSEMBLY DRAWING
CHECKED: Perry Munroe	DRAWN: Huy Nguyen	ITEM: POGO-PIN-5.52-1	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-5.52-1

NO.	ITEM	MATERIAL / SURFACE	QTY.
①	PLUNGER	BeCu / ALLOY PLATING2-2	1
②	BARREL	Bs / Au(0.5µm) Over Ni(1.0µm)	1
③	PLUNGER	BeCu / Au(0.5~ µm) Over Ni(4.0~ µm)	1
④	SPRING	SUS	1